



OFFSHORE TECHNOLOGY
REPORT - OTO 93 026

STATISTICS OF WAVE BREAKING
IN THE SOUTHERN NORTH SEA

by

J A Ewing

This report is published by the Health and Safety Executive as part of a series of reports of work which has been supported by funds provided by the Executive. Neither the Executive, nor the contractors concerned assume any liability for the reports nor do they necessarily reflect the views or policy of the Executive.

Reports in the OTO series may be obtained from HSE Information Services, Information Centre, Broad Lane, Sheffield S3 7HQ
Tel: 0742 892345, Fax: 0742 892333, Telex: 54556.

CONTENTS

SUMMARY

1. INTRODUCTION
2. METHOD OF CALCULATION OF BREAKING WAVE STATISTICS
 - 2.1 Theory
 - 2.2 Procedure
3. SOURCES OF WAVE DATA FOR THE SOUTHERN NORTH SEA
 - 3.1 Wave measurements
 - 3.2 Hindcast data
 - 3.3 Visual observations
4. CALCULATIONS OF STATISTICS
 - 4.1 Results
 - 4.2 Sensitivity of the calculations to water depth
5. CONCLUSIONS
6. RECOMMENDATIONS
7. REFERENCES
8. NOMENCLATURE
9. FIGURE
10. TABLES
 - Table 1 : Table of the probability of breaking waves, Q .
 - Table 2 : Data from wave measurements
 - Table 3 : Data from hindcast data
 - Table 4 : Data from visual observations

SUMMARY

This study estimates the number of breaking waves in one year at locations in shallow parts of the southern North Sea.

The sources of wave data used are taken from wave measurements, hindcasts and visual observations. The annual occurrence of breaking waves is computed from the "scatter diagram" of wave height and wave period. The probability of wave breaking then follows from the theoretical work of Battjes & Janssen (1978).

Conclusions and recommendations for future work are presented.

1. INTRODUCTION

The purpose of this study is to estimate the annual number of breaking waves at certain locations in the southern North Sea due to the influence of shallow water. The area bounded in the north by latitude 55°N and in the south by the Straits of Dover is considered.

At present there are no observations of the probability of occurrence of wave breaking due to shallow water in this area. Observational methods are still in their early development (for example, Longuet-Higgins & Smith (1983), Holthuijsen & Herbers (1986)) and these few observations have concentrated on wave breaking in deep water. Two recent reviews of wave breaking in deep water have been made by Srokosz (1990) and Banner & Peregrine (1993). A review of wave breaking in shallow water is given in Peregrine (1983).

Wave data obtained from measurements, hindcasts and visual observations are used in this study. The annual occurrence of wave heights and periods (the "scatter diagram") at each location or for each area is then used to estimate the number of breaking waves in one year based on the shallow water criterion given by Battjes & Stive (1985) and the probability of wave breaking following the theory of Battjes & Janssen (1978). For a recent review of breaker height criteria the reader is referred to Southgate (1993).

The results derived in this study will supplement present information given in the HSE "Offshore Installations : Guidance on design, construction and certification" Fourth Edition, January 1990. Section 11, paragraph 11.4.4 (Shallow water effects) and the corresponding Appendix A11.4.4.

2. METHOD OF CALCULATION OF BREAKING WAVE STATISTICS

2.1 THEORY

The wave height at which breaking starts to occur for a given water depth, bed slope and wave characteristics, is taken from the work of Battjes & Stive (1985). It is usual to express the breaker height H_b as a function of water depth d by $H_b = \gamma d$.

Battjes and Stive have carried out a comprehensive study of random wave breaking in both laboratory and field experiments. They found that

$$\gamma = 0.5 + 0.4 \tanh(33s_0) \quad (1)$$

where s_0 is the deep-water wave steepness given by

$$s_0 = H_{rms}(\text{offshore})/L_0(\text{offshore})$$

L_0 is the wavelength corresponding to the peak spectral wave period (i.e. $L_0 = gT_0^2/2\pi$).

The probability of wave breaking follows the theory of Battjes & Janssen (1978). The Rayleigh distribution of wave heights is taken to represent the distribution of wave heights :

$$P(H) = \frac{2H}{H_{rms}^2} \cdot \exp(-H^2/H_{rms}^2)$$

Then, in shallow water, this distribution is truncated at the breaker height H_b . Battjes & Janssen assume that all broken waves have a wave height given by H_b , thus resulting in a probability distribution truncated at H_b to represent unbroken waves but with a delta function at H_b to represent the broken waves. Battjes and Janssen then show that the probability of occurrence of broken waves, Q , is related to H_{rms} and H_b by

$$\frac{1 - Q}{-\ln Q} = \left(\frac{H_{rms}}{H_b} \right)^2 \quad (2)$$

Given values of H_{rms} and H_b , then equation (2) can be solved for Q by an iterative procedure.

Table 1 gives the values of Q for particular values of $a = (H_{rms}/H_b)^2$.

It is not at present possible to comment on the relative occurrence of spilling and plunging breakers in shallow water although it is generally believed that plunging breakers occur more frequently.

2.2. PROCEDURE

The wave data to be described in the next section consist of the probability of occurrence of values of significant wave height, H_s , and peak spectral period, T_0 , or the mean zero crossing period, T_z . (i.e. the "Scatter Diagram").

The following relations were used :

$$H_{rms} = H_s/\sqrt{2} \quad \text{and} \quad T_0 = 1.28T_z.$$

Equation (1) was first computed for the value of γ and hence H_b . Q was then calculated from equation (2). Finally, the total number of breaking waves in 1 year, N_b , was calculated by

summing the contributions for each cell of the "scatter diagram" by taking into account the probability of occurrence of particular combinations of wave height and period.

3. SOURCES OF WAVE DATA FOR THE SOUTHERN NORTH SEA

The sources to be considered in the analysis for wave breaking in the southern North Sea have been taken from three kinds of data : wave measurements, hindcast data from numerical wave models and visual observations.

3.1 WAVE MEASUREMENTS

The scatter diagrams for wave analyses made by the Institute of Oceanographic Sciences and its predecessor, the National Institute of Oceanography, were used for Dowsing, Galloper and Tongue. Confidential data from West Sole were kindly supplied by BP. The measurements at Dowsing, Galloper and Tongue were made with the Shipborne Wave Recorder (SBWR). Data at West Sole were obtained from a Baylor Wavestaff.

The positions of the stations are given in the following table and are shown in Figure 1 :

Station	Position lat., long.	Depth of water m
Dowsing	53.6°N, 0.8°E	26
Galloper	51.7°N, 2.0°E	29
Tongue	51.5°N, 1.4°E	13
West Sole	53.7°N, 1.1°E	24

3.2 HINDCAST DATA

Wave hindcast data (ANEP, 1987) from the Second Generation wave model, HYPAS, were used at four grid points within the southern North Sea. The statistical data given in ANEP (1987) cover the years 1968-1983 and were hindcast from information from synoptic weather charts reported every six hours. The wave model HYPAS uses information on wind-generated shallow water waves and includes shallow water wave damping on swell.

The positions of the four grid points are given in the following table and in Figure 1 :

Grid Point	Position lat., long.	Depth of water m
3	53.11°N, 1.14°E	8
5	54.52°N, 2.94°E	31
8	53.41°N, 5.28°E	5
10	54.74°N, 7.27°E	31

3.3 VISUAL OBSERVATIONS

Data from visual observations have been compiled by Korevaar (1989) at the KNMI. The data are based on observations made from voluntary observing ships over the period 1961-1980. Data from this source in the southern North Sea are shown for the 8 areas denoted by reference numbers 19-26 inclusive in Figure 1.

4. CALCULATIONS OF STATISTICS

4.1 RESULTS

The calculations of the total number of breaking waves in 1 year, N_b , are shown in Tables 2, 3 and 4 for wave measurements, hindcast data and visual observations respectively.

For the wave measurement sites given in Section 3.1, it was found that wave breaking due to shallow water could not occur for the depths of water at these stations. This is probably due to the choice of a measurement station where it is not desirable to have active wave breaking at the site of a wave recorder. It was therefore decided to calculate the statistics for an assumed nearshore position with depth 10m. Tables 2 show the results.

For the hindcast data, wave breaking due to shallow water occurred at Grid Points 3 and 8. But the depths of water at Grid Points 5 and 10 were too great and an assumed nearshore position with depth 10m was taken. (The wave direction, which is available for the hindcast data, was used in estimating the probability of occurrence of wave height and period). Tables 3 show the results. The variation of N_b with wave period is shown for these data.

For the visual observations, it was found that the areas shown in Figure 1 covered too large a range of depths for any "typical" depth to be chosen. It was decided to make the calculations for a nominal depth of 10m except for area 20 where no depth was less than 10m.

4.2 SENSITIVITY OF THE CALCULATIONS TO WATER DEPTH

The calculations of the number of breaking waves are very sensitive to the ratio of wave height to water depth as shown in Table 1. To obtain some indication of this sensitivity the calculations with wave measurements at Dowsing were repeated for water depths of 9m and 11m. The results are shown in the following table :

Influence of water depth on wave breaking

h_b (m)	N_b		
	Water depth (m)		
	9	10	11
4.75	97	38	14
4.25	116	35	9
3.75	58	13	3
3.25	26	4	0
Totals	297	90	26

5. CONCLUSIONS

Wave breaking due to shallow water in the southern North Sea is negligible for water depths greater than 20m. For the typical wave climate in this region most wave breaking takes place in depths less than 10m.

The total number of breaking waves in one year was found to be very sensitive to the water depth. For example, a change in water depth of + 1m at Dowsing caused the number of breaking waves in one year to vary by a factor of 4. The simple model described in this report is a first step in calculating wave breaking in the southern North Sea. The model does not consider the effect of currents on wave breaking nor the influence of tidal levels.

The results given in this report are a general indication of the annual number of breaking waves due to shallow water. There is at present no observational evidence to confirm these statistics. However the method can be used to evaluate wave breaking statistics at different sites for comparative design purposes.

6. RECOMMENDATIONS

Accurate calculations of wave breaking in shallow water are needed to take into account the influence of surface currents and tidal levels. Coastal engineers (e.g. Southgate, 1989) have developed wave models which can account for these processes but these models need to be modified to predict breaking wave statistics on an annual basis.

The main requirement is the need for observational methods which can be used to quantify and collect breaking wave statistics. A review should be made of suitable techniques for use in coastal waters.

The existence of breaking waves is not included in extreme value estimation for shallow water waves as presently given in the "Guidance Notes". The methods discussed in the "Guidance Notes" are based on the use of the Fisher-Tippett I (FT-I) distribution for the estimate of the 50-year return value of H_a . It should be possible to use the Fisher-Tippett III distribution which has an upper bound. (The FT-I distribution is unbounded above). Then, by taking the upper bound equal to H_b , an estimate of the 50-year return value of H_a can be obtained.

7. REFERENCES

- ANEP (1987) "Seasonal climatology of the North Sea" Allied Engineering Eng. Publication 14, NATO.
- Banner, M.L. and D.H. Peregrine (1993). "Wave breaking in deep water" Annual Rev. Fluid Mech., 25, 373-397.
- Battjes, J.A. and P.A.E.M. Janssen (1978). "Energy loss and set-up due to breaking of random waves" Proc. 16th Conf. Coastal Eng., ASCE, Hamburg, 569-587.
- Battjes, J.A. and M.J.F. Stive (1985) "Calibration and verification of a dissipation model for random breaking waves" J. Geophys. Res., 90, 9159-9167.
- Draper, L. (1976) "Waves at Dowsing Light Vessel, North Sea" IOS Report No. 31.
- Draper, L. (1977) "Waves at Galloper Light Vessel" IOS Report No. 57.
- Draper, L. and E.G. Dobell (1971) "Waves at the Tongue Light Vessel, outer Thames estuary" NIO Internal Report No. A49.
- Korevaar, C.G. (1989) "Climatological data for the North Sea based on observations by voluntary

observing ships over the period 1961-1980" KNMI, de bilt, Netherlands, Scientific Report 89-02.

Holthuijsen, L.H. and T.H.C. Herbers (1986) "Statistics of breaking waves observed as whitecaps in the open ocean". J.Phys.Oceanogr., 16, 290-297.

Longuet-Higgins, M.S. and N.D. Smith (1983) "Measurement of breaking waves by a surface jump meter" J.Geophys.Res., 88, 9823-9831.

Peregrine, D.H. (1983) "Breaking waves on beaches" Annual Rev. Fluid Mech., 15, 149-178.

Southgate, H.N. (1989) "A nearshore profile model of wave and tidal current interaction" Coastal Eng., 13, 219-245.

Southgate, H.N., (1993) "Review of wave breaking" In Advances in Underwater Technology, Ocean Science and Offshore Eng., Volume 29, 251-273, Society for Underwater Technology Conference on Wave kinematics and environmental forces, London, March 1993, Kluwer Acad. Publishers.

Srokosz, M.A. (1990) "Wave statistics" In Surface waves and fluxes", Ed. G.L.Geernaert and W.J.Plant, Kluwer Academic Publishers, Netherlands, Vol.1, 285-332.

8. NOMENCLATURE

- a = $(H_{rms}/H_b)^2$
d = depth of water
g = acceleration due to gravity
H_b = breaker height
H_{rms} = r.m.s. wave height
H_s = significant wave height
N_b = number of breaking waves in one year
L_o = wavelength corresponding to the peak wave period
Q = probability of occurrence of breaking waves
s_o = deep-water wave steepness
T_o = peak spectral wave period
T_z = mean zero-crossing wave period
γ = ratio of H_b to d

9. FIGURE

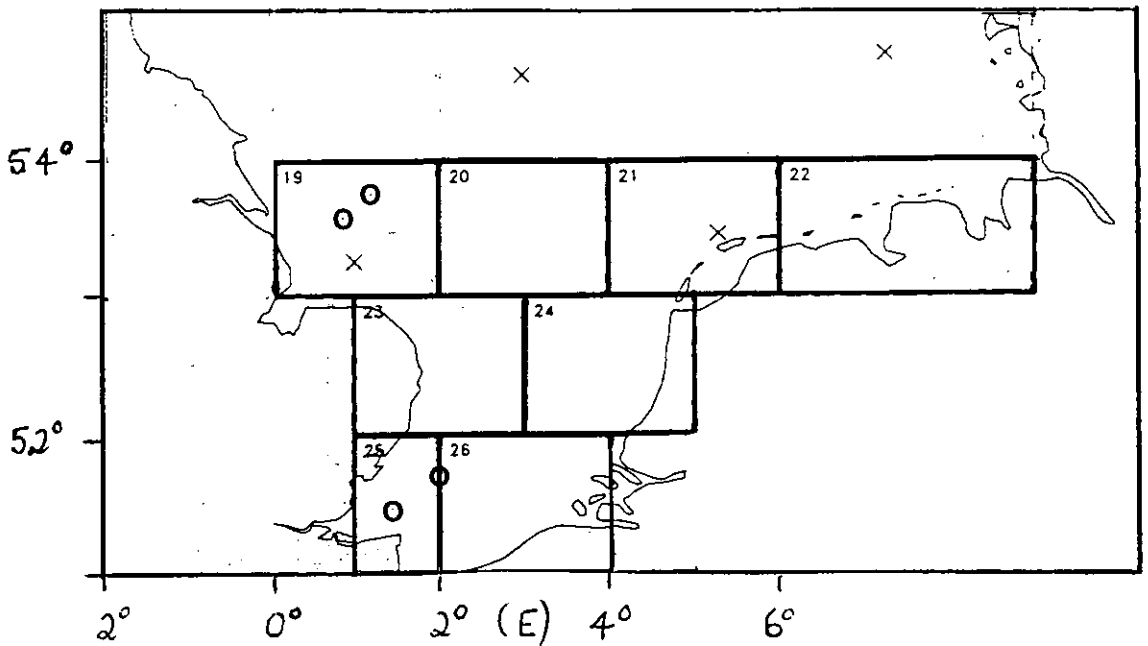


Figure 1 : Wave measurement stations are shown by O. Hindcast grid points from ANEP (1987) are shown by X. Eight areas from Korevaar (1989) are indicated by the numbers in the top left corner of each area.

10. TABLES

TABLE 1

Table of values of $a=(H_{rms}/H_b)^2$ and the probability of breaking waves, Q .

a	Q
1.000	1.000
0.975	0.950
0.950	0.902
0.900	0.807
0.85	0.716
0.80	0.629
0.75	0.546
0.70	0.467
0.65	0.324
0.55	0.261
0.50	0.203
0.45	0.152
0.40	0.107
0.35	0.0702
0.30	0.0409
0.25	0.0198
0.20	6.89E-03
0.15	1.28E-03
0.10	4.54E-05
0.05	2.06E-08

TABLE 2(a)**Measured wave data at DOWSING**

Wave breaking at an inshore depth of 10m

Hs (m)	Tz (s)	Nb
4.75	8.25	38
4.25	7.25	35
3.75	7.25	13
3.25	6.75	4
Total =		90

TABLE 2(b)**Measured wave data at GALLOPER**

Wave breaking at an inshore depth of 10m

Hs (m)	Tz (s)	Nb
5.18	6.5	22
5.03	6.5	8
4.88	7.0	40
4.73	6.5	4
4.57	6.0	12
4.42	6.0	16
4.27	6.0	28
Total =		130

TABLE 2(c)**Measured wave data at TONGUE**

Wave breaking at an inshore depth of 5m

Hs (m)	Tz (s)	Nb
2.44	6.0	205
2.29	6.0	137
2.13	6.0	78
1.98	5.2	23
1.83	5.0	20
1.68	4.5	5
Total =		468

TABLE 2(d)

Measured wave data at WEST SOLE (CONFIDENTIAL)
 Wave breaking at an inshore depth of 10m

Hs (m)	Tz (s)	Nb
7.25	8.5	702
6.75	8.0	320
6.25	8.0	389
5.75	8.5	361
5.25	8.0	203
4.75	8.0	136
4.25	7.5	80
3.75	7.0	23
Total = 2214		

TABLE 3(a)

Data from Hindcast wave heights (ANEP,1987)
 Grid point 3. Depth at grid point = 8m

Hs (m)	To (s)	Nb
4.5	18.3	277
3.5	7.7	9
"	8.3	12
"	9.1	19
"	10.0	28
"	11.3	42
"	12.6	56
"	13.3	60
"	14.3	71
Sub-total =		297
2.5	9.1	4
"	10.0	5
Sub-total =		9
Total = 583		

TABLE 3(b)

Data from Hindcast wave heights (ANEP,1987)
 Grid point 5. Depth taken as 10m

Hs (m)	To (s)	Nb
6.5	12.5	352
5.5	10.0	356
4.5	9.1	101
3.5	8.3	7
Total =		816

TABLE 3(c)

Data from Hindcast wave heights (ANEP,1987)
 Grid point 8. Depth at grid point = 5m

Hs (m)	To (s)	Nb
4.5	10.0	2212
3.5	6.7	448
"	7.7	563
"	8.3	644
"	9.1	744
"	10.0	856
"	11.3	1020
"	12.5	1119
"	13.3	1187
"	14.3	1235
Sub-total =		6629
2.5	5.7	798
"	6.7	1024
"	7.7	759
"	8.3	114
"	9.1	697
"	10.0	690
"	11.3	422
"	12.5	237
Sub-total =		4741
1.5	8.3	18
"	9.1	36
"	10.0	20
"	11.3	5
"	12.5	3
Sub-total =		82
Total =		13664

TABLE 3(d)

Data from Hindcast wave heights (ANEP,1987)
Grid point 10. Depth taken as 10m

Hs (m)	To (s)	Nb
6.5	12.5	705
5.5	11.3	1339
4.5	10.0	716
3.5	8.3	24
Total = 2784		

TABLE 4

Data from visual observations (Korevaar,1989)

A depth of 10m was taken throughout these calculations since the areas concerned cover a wide range of depths none of which can be considered representative.

TABLE 4(a)

Area 20

A depth of 10m was taken throughout these calculations since the areas concerned cover a wide range of depths none of which can be considered representative.

Area 24

Data from Fig.94

Hs (m)	Tz (s)	Nb
6.0	9.0	620
4.0	8.0	165
Total = 785		

TABLE 4(b)

Data from Fig.99 : Jan.1961-1980

Area	Hs (m)	Tz (s)	Nb
19	3.75	8.0	203
21	"	"	121
22	"	"	81
23	"	"	203
25	"	"	41
26	"	"	81